

Tender specification:

“Copert” PE-RT plastic pipes


for surface heating and cooling systems.

PE-RT pipes according to DIN 16833, DIN 16834,
oxygen tight according to DIN 4726

Minimum bending radius: 5 x outer diameter

Dimension	Max. operating pressure p _s : at 70 °C
14 x 2 mm	6 bar
16 x 2 mm	6 bar
17 x 2 mm	6 bar
20 x 2 mm	6 bar

“Copert” PE-RT plastic pipes on rolls					
Item no.	Dim.	Length per roll	Core Ø of roll	Outer Ø of roll	Height of roll
1402052	14 x 2	240 m	430 mm	760 mm	190 mm
1402054	14 x 2	600 m	500 mm	880 mm	285 mm
1402152	16 x 2	240 m	470 mm	780 mm	250 mm
1402154	16 x 2	600 m	390 mm	880 mm	285 mm
1402252	17 x 2	240 m	470 mm	780 mm	250 mm
1402254	17 x 2	600 m	420 mm	960 mm	300 mm
1402352	20 x 2	240 m	350 mm	780 mm	260 mm

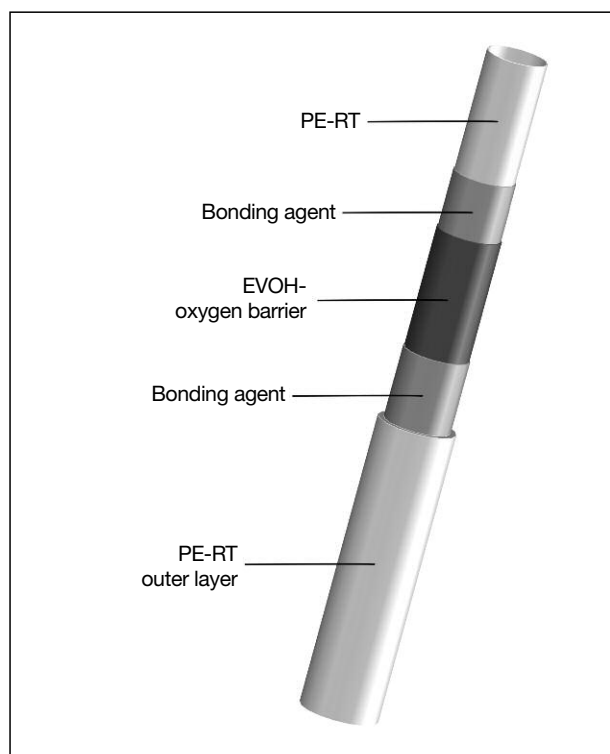

“Copert” PE-RT plastic pipe

OVENTROP GmbH & Co. KG
Paul-Oventrop-Straße 1
D-59939 Olsberg
Germany
Telephone +49(0) 2962 82-0
Fax +49(0) 2962 82-450
E-Mail mail@oventrop.de
Internet www.oventrop.de

For an overview of our global presence
visit www.oventrop.de

Subject to technical modification without notice.

Product range 2
ti 277-EN/20/MW
Edition 2015